

SC70-6 Package Low IQ High Light Load Efficiency Synchronous Boost Converter

FEATURES

- Deliver 3.3V at 60mA from a Single Alkaline/Ni-MH or 3.3V at 120mA from Two Cells
- Up to 94% Efficiency
- Low Shutdown Current: <math><1.0\mu\text{A}</math>
- Low Quiescent Current: 7.5 μA
- Low No-load Input Current (see Typical Performance Characteristics for detail)
- Start up Into Load at 0.7V Input Voltage
- Output Disconnect by Shutdown Function
- Anti-ringing Control for EMI Consideration
- Small SC70-6 Package

APPLICATIONS

- Wireless Mice
- Medical Instruments
- Smart Phones
- Bluetooth Devices

DESCRIPTION

The AIC3411 is a synchronous step-up DC/DC converter. That is based on constant Off Time/PSM controller topology. The IC enters PSM mode automatically at light load, the goal is to improve efficiency and reduce quiescent current. The AIC3411 provide a complete power supply solution for products powered by one or two Alkaline, Ni-Cd, or Ni-MH battery cells. It stays in operation with supply voltages down to 0.7V. The implemented boost converter is based on a constant Off Time/PSM controller topology using an internal synchronous rectifier to obtain maximum efficiency. A low-EMI mode is implemented to reduce ringing and in effect lower radiated electromagnetic energy when the converter enters the discontinuous conduction mode.

TYPICAL APPLICATION CIRCUIT


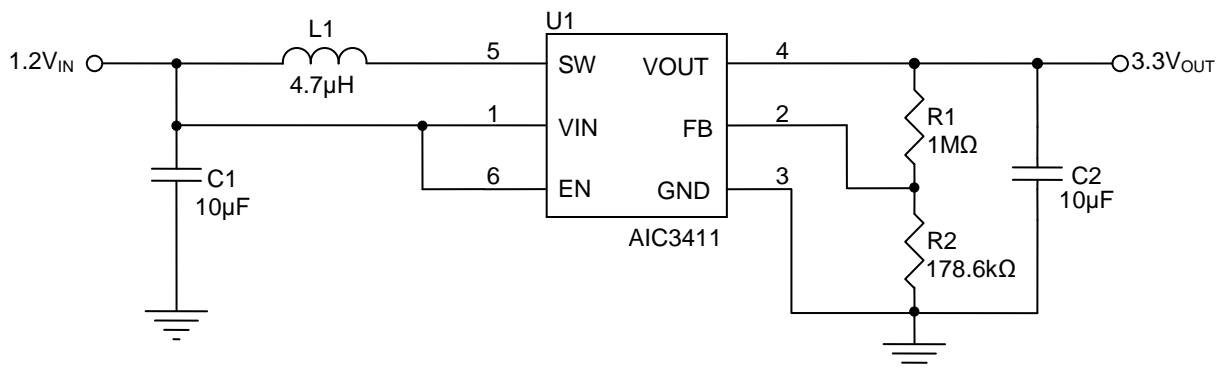



Fig. 1 One Cell Step-Up DC/DC Converter

ORDERING INFORMATION

AIC3411XXXXX

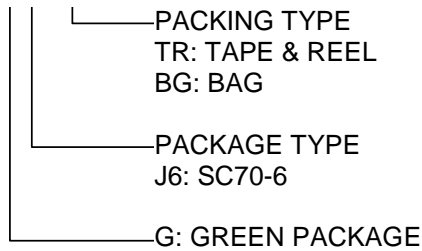

Example: AIC3411GJ6TR
 → In SC70-6 Green Package & Tape & Reel Packing Type

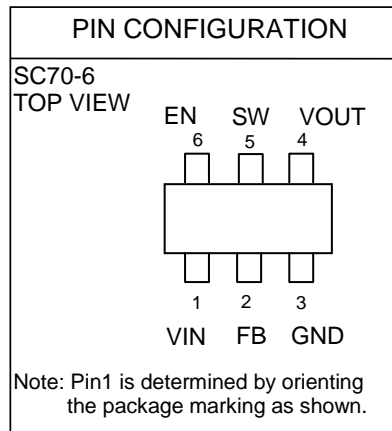

Marking

Part No.	Marking
AIC3411GJ6	411

ABSOLUTE MAXIMUM RATINGS

Pin Voltage: FB, EN, OUT, VIN	-0.3 V to 6V
Pin Voltage: SW	
DC	-0.3 V to 6V
Pulsed < 100ns	-0.3 V to 7V
Operating Ambient Temperature Range T_A	-40°C to 85°C
Operating Maximum Junction Temperature T_J	150°C
Storage Temperature Range T_{STG}	-65°C to 150°C
Lead Temperature (Soldering 10 Sec.).....	260°C
Thermal Resistance Junction to Ambient	300°C/W

(Assume no Ambient Airflow, no Heatsink)

Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

TEST CIRCUIT

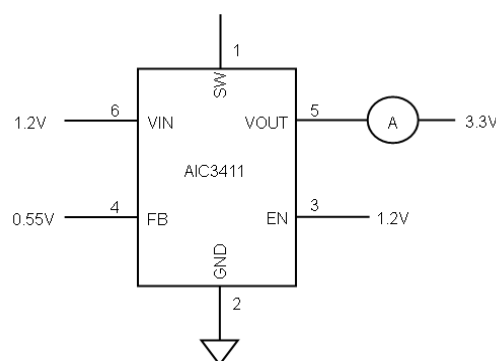


Fig. 2 Test Circuit

■ ELECTRICAL CHARACTERISTICS

(Typical application circuit and the ambient temperature=25°C, $V_{IN}=1.2V$, $V_{OUT}=3.3V$, unless otherwise specified)(Note 1)

PARAMETER	TEST CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
Output Voltage Range		V_{OUT}	1.65		5.5	V
Minimum Start Up Voltage	$RL= 3.3K\Omega$			0.7	0.9	V
Input Operation Voltage			0.7		5	V
Under Voltage Lockout of V_{in}	V_{in} decreasing	V_{UVLO}		0.5	0.7	V
Quiescent Current (PSM)	$V_{IN}=1.2V$, $V_{OUT}=3.3V$, $V_{FB}=0.55V$ (Note 2)	I_Q		7.5	12.5	μA
IC Shut Down Current	$EN = 0V$, $V_{OUT} = 1.1V$	I_{SD}		0.01	1.0	μA
Feedback Voltage		V_{FB}	490	500	510	mV
FB Input Leakage Current	$V_{FB}=1.3V$	I_{FB}		1	50	nA
Inductor current ripple		I_{LH}		200		mA
Constant off time	$V_{IN}=1.2V$, $V_{OUT}=3.3V$	T_{OFF}		400		ns
Line Regulation	$V_{IN}<V_{OUT}$ (Note 3)			0.5%		
Load Regulation	$V_{IN}<V_{OUT}$ (Note 3)			0.5%		
NMOS Switch Leakage	$V_{SW}=5V$			0.1	5	μA
PMOS Switch Leakage	$V_{SW}=5V$, $V_{OUT}=0V$			0.1	10	μA
NMOS Switch On Resistance	$V_{IN}=1.2V$, $V_{OUT}=3.3V$			400		m Ω
PMOS Switch On Resistance	$V_{IN}=1.2V$, $V_{OUT}=3.3V$			800		m Ω
EN High Threshold Voltage	$V_{IN}=1.2V$		0.8			V
EN Low Threshold Voltage	$V_{IN}=1.2V$				0.2	V
EN Pin Input Current	$EN = 5.5V$	I_{SHDN}		0.01	1.0	μA
NMOS Current Limit	$V_{IN}=1.2V$, $V_{OUT}=3.3V$		0.24	0.4		A
Over Temperature Protection				140		$^{\circ}C$
Over Temperature Hysteresis				20		$^{\circ}C$

Note 1: Specifications are production tested at $T_A=25^{\circ}C$. Specifications over the $-40^{\circ}C$ to $85^{\circ}C$ operating temperature range are assured by design, characterization and correlation with Statistical Quality Controls (SQC).

Note 2: The test circuit shown in Fig. 2.

Note 3: Guarantee by Design.

TYPICAL PERFORMANCE CHARACTERISTICS

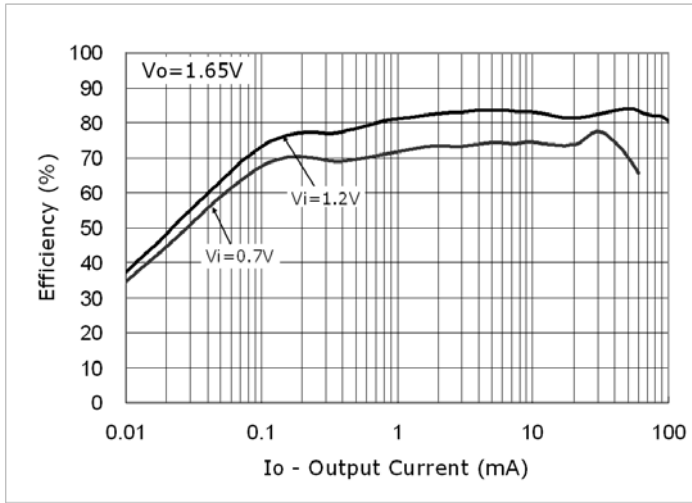


Fig. 3 Efficiency vs. Load Current

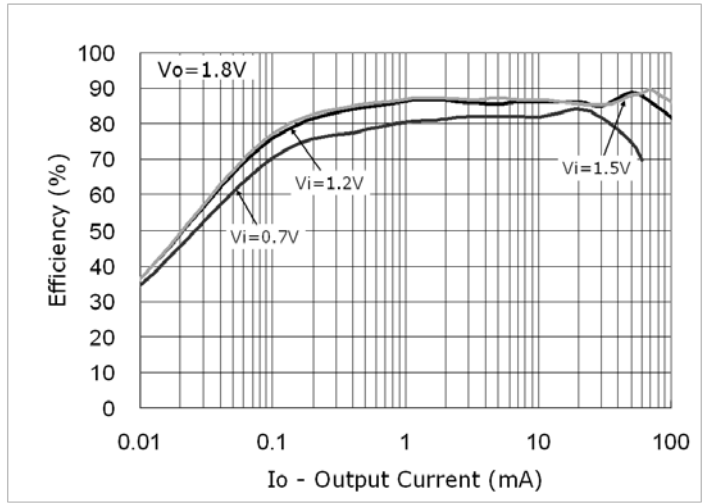


Fig. 4 Efficiency vs. Load Current

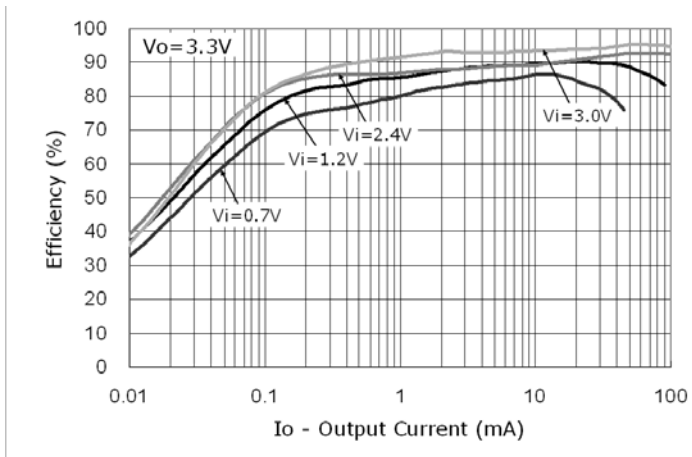


Fig. 5 Efficiency vs. Load Current

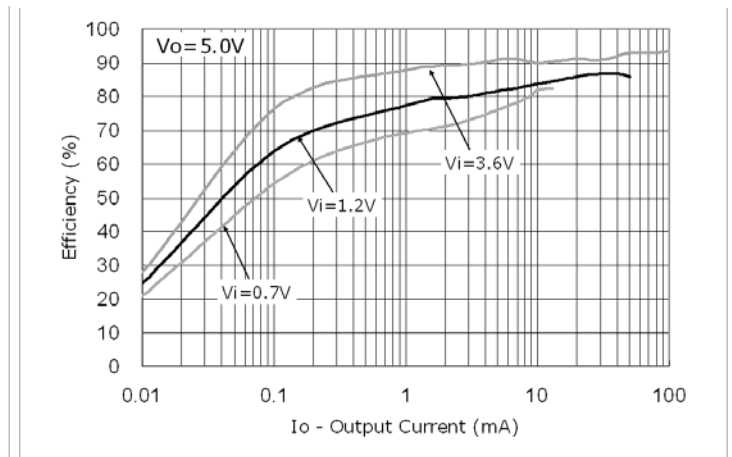


Fig. 6 Efficiency vs. Load Current

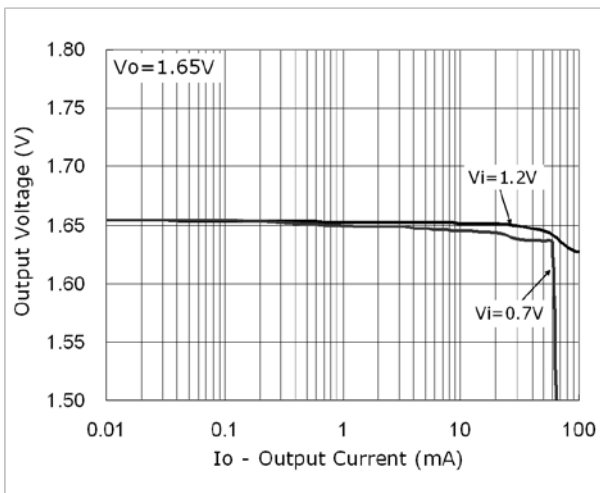


Fig. 7 Output Voltage vs. Output Current

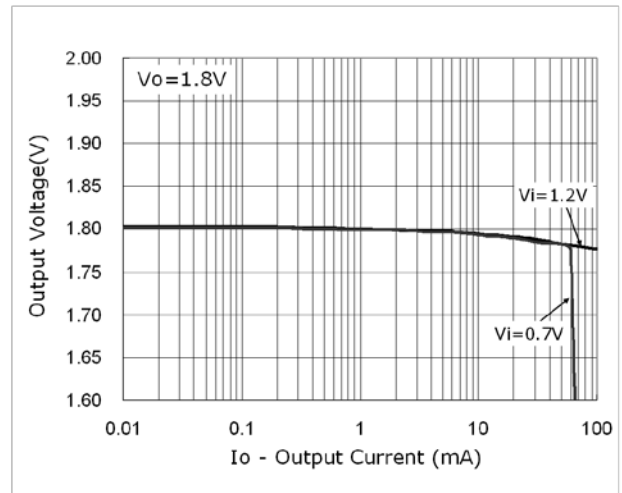


Fig. 8 Output Voltage vs. Output Current

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

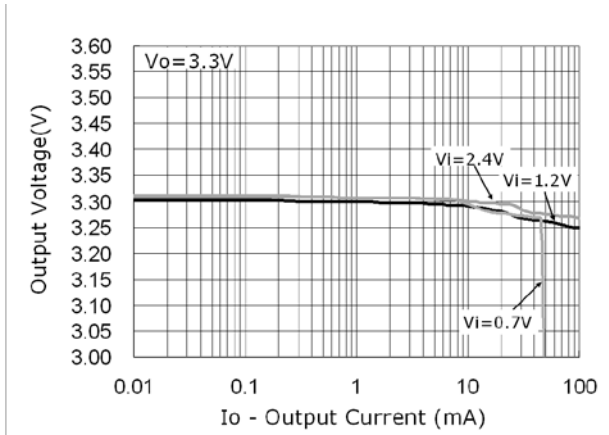


Fig. 9 Output Voltage vs. Output Current

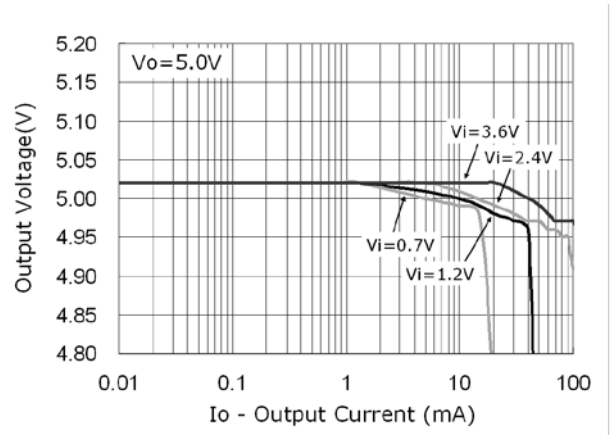


Fig. 10 Output Voltage vs. Output Current

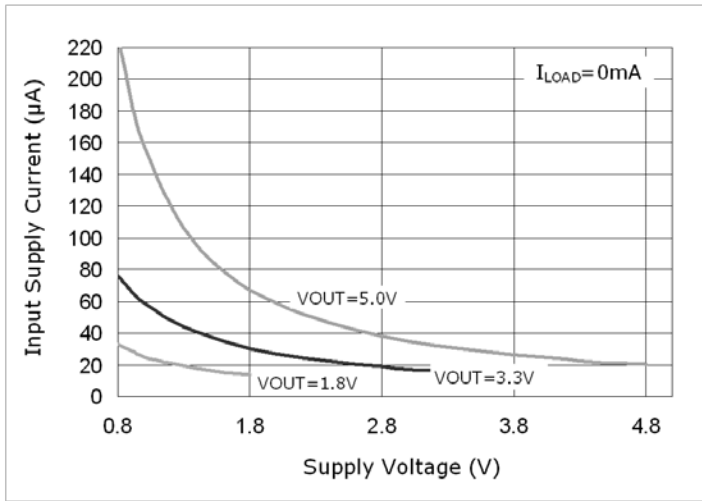


Fig. 11 No Load Input Current vs. Input Voltage

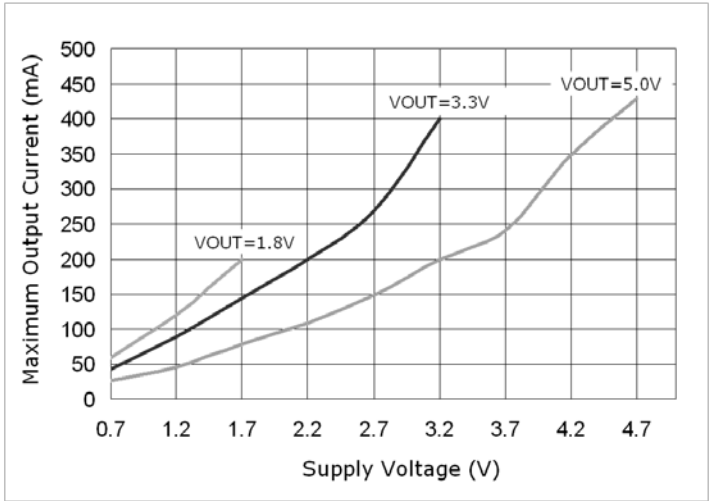


Fig. 12 Maximum Output Current vs. Input Voltage

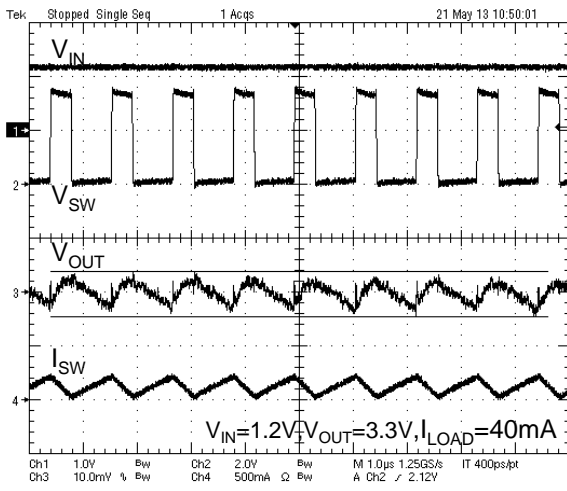


Fig. 13 Switching Waveform

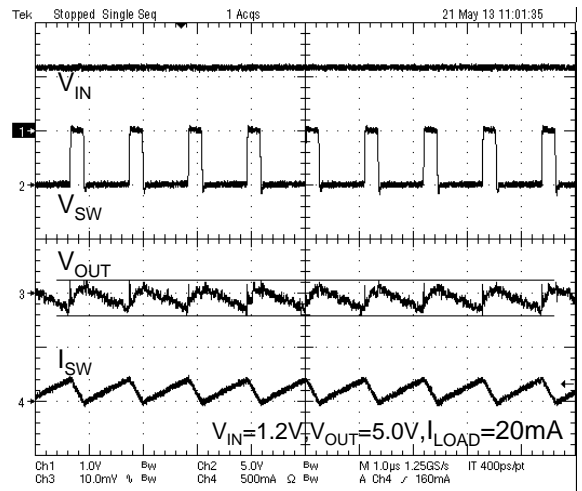


Fig. 14 Switching Waveform

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

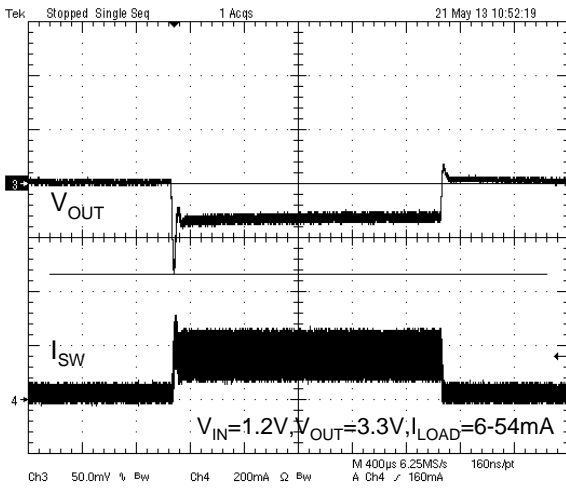


Fig. 15 Load Transient Response


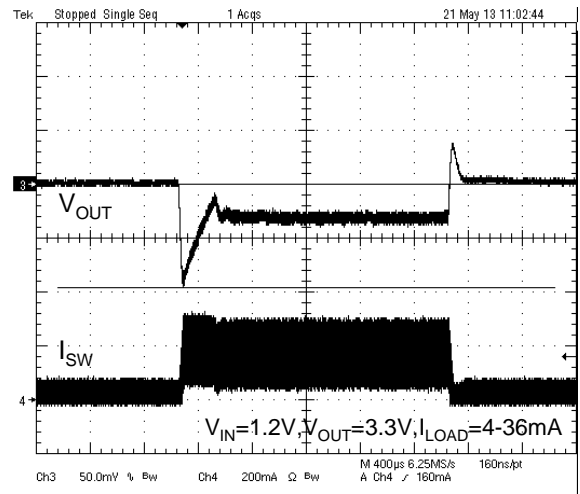


Fig. 16 Load Transient Response

■ BLOCK DIAGRAM

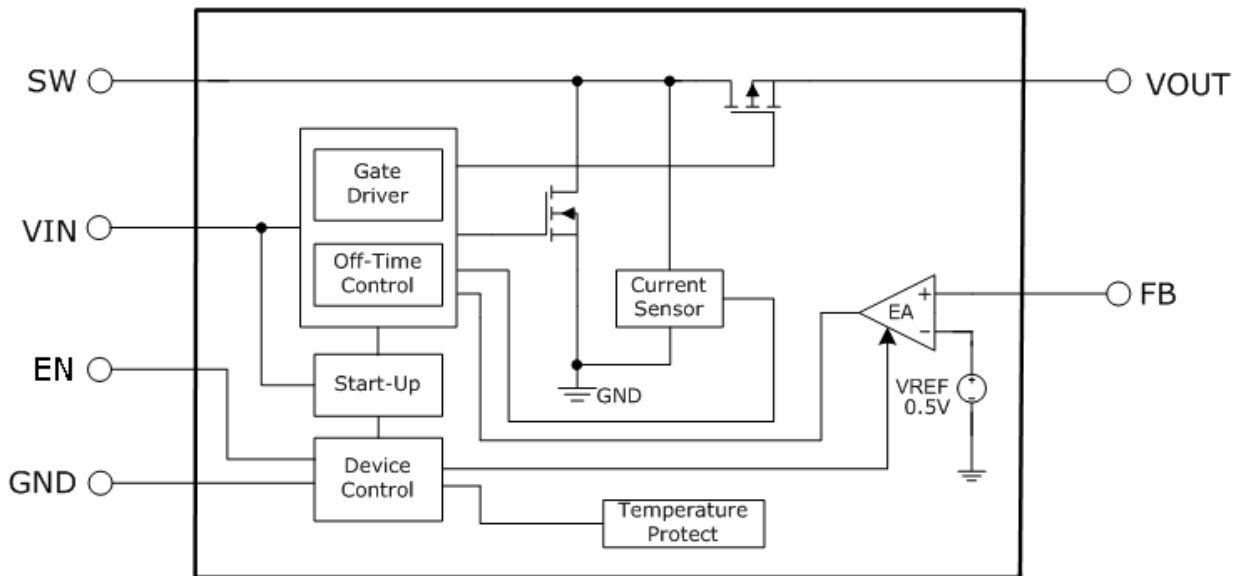

Functional Block Diagram of AIC3411

■ PIN DESCRIPTIONS

- | | | | | | |
|-------------|---|--|-----------|---|--|
| PIN 1: VIN | - | Input Supply Pin. | PIN 5: SW | - | Switch Pin. Connect Inductor between VIN and this pin. |
| PIN 2: FB | - | Feedback Input to Error Amplifier. Connect resistor divider tap to this pin. | PIN 6: EN | - | Logic Controlled Shutdown Input.
EN= High: Normal Operation.
EN= Low: IC shutdown. |
| PIN 3: GND | - | Signal and Power Ground. | | | |
| PIN 4: VOUT | - | Output Voltage Sense and Drain of the Internal Synchronous Rectifier | | | |

■ APPLICATION INFORMATION

The AIC3411 is a synchronous step-up DC-DC converter. It is based on constant Off Time/PSM controller topology. At the beginning of each clock cycle, the main switch (NMOS) is turned on and the inductor current starts to ramp. After the sense current signal equals the error amplifier (EA) output, the main switch is turned off and the synchronous switch (PMOS) is turned on. The device can operate with an input voltage below 1V; the typical start-up voltage is 0.7V.

Current Limit

The over current protection is to limit the switch current. The output voltage will be dropped when over current is happened. The current limit amplifier will turn off switch once the current exceeds its threshold.

Zero Current Comparator

The zero current comparator monitors the inductor current to the output and shuts off the synchronous rectifier. This prevents the inductor current from reversing in polarity improving efficiency at light loads.

Device Shutdown

When EN is set logic high, the AIC3411 is put into active mode operation. If EN is set logic low, the device is put into shutdown mode and consumes less than 1μA of current. At the shutdown mode, the synchronous switch will turn off and the output voltage of AIC3411 step-up converter will reduce to 0V. After start-up, the internal circuitry is supplied by V_{OUT}, however, if shutdown mode is enabled, the internal circuitry will be supplied by the input source again.

Adjustable Output Voltage

An external resistor divider is used to set the output voltage. The output voltage of the switching regulator (V_{OUT}) is determined by the following equation:

$$V_{OUT} = V_{FB} \times \left(1 + \frac{R_1}{R_2}\right)$$

Where V_{FB} is 0.5V reference voltage.

Input Inductor Selection

The inductor values of 4.7 μH can get the good per-

formance over the whole converter ratio cases.

To choose other inductance values by the following equation:

$$L = \frac{(V_{OUT} - V_{IN}) \times 614.07 \times (V_{OUT} - V_{IN})^{-0.3781}}{200\text{mA}} \quad (\mu\text{H})$$

Using inductor values below 2.2 μH is not recommended.

Input Capacitor Selection

Surfaces mount 4.7μF or greater, X5R or X7R, ceramic capacitor is suggested for the input capacitor. The input capacitor provides a low impedance loop for the edges of pulsed current drawn by the AIC3411. Low ESR/ESL X7R and X5R ceramic capacitors are ideal for this function. To minimize stray inductance, the capacitor should be placed as close as possible to the IC. This keeps the high frequency content of the input current localized, minimizing EMI and input voltage ripple. Always examine the ceramic capacitor DC voltage coefficient characteristics to get the proper value.

Output Capacitor Selection



The output capacitor limits the output ripple and provides holdup during large load transitions. A 4.7μF to 10μF, X5R or X7R, ceramic capacitor is suggested for the output capacitor. Typically the recommended capacitor range provides sufficient bulk capacitance to stabilize the output voltage during large load transitions and has the low ESR and ESL characteristics necessary for low output voltage ripple.

PCB Layout Guidance




This is a considerably high frequency for DC-DC converters. PCB layout is important to guarantee satisfactory performance. It is recommended to make traces of the power loop, especially where the switching node is involved, as short and wide as possible. First of all, the inductor, input and output capacitor should be as close to the device as possible. Feedback and shutdown circuits should avoid the proximity of large AC signals involving the power inductor and switching node.

■ PHYSICAL DIMENSIONS

● SC70-6

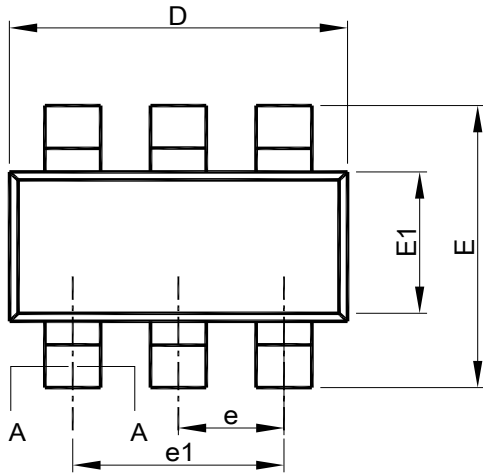

SEE VIEW B

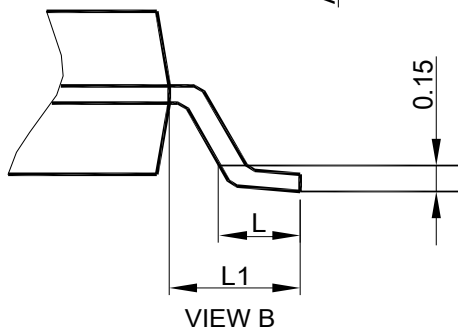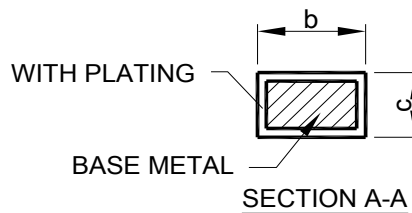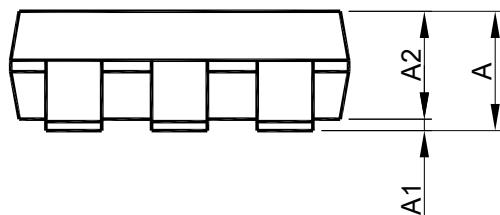

GAUGE PLANE SEATING PLANE

SYMBOL	SC70-6	
	MILLIMETERS	
	MIN.	MAX.
A	-	1.10
A1	0	0.10
A2	0.70	1.00
b	0.15	0.30
c	0.08	0.25
D	1.85	2.15
E	1.80	2.40
E1	1.10	1.40
e	0.65 BSC	
e1	1.30 BSC	
L	0.26	0.46
L1	0.42 REF	

- Note: 1. Refer to JEDEC MO-203AB.
 2. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 6 mil per side.
 3. Dimension "E1" does not include inter-lead flash or protrusions.
 4. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.

Note:

Information provided by AIC is believed to be accurate and reliable. However, we cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an AIC product; nor for any infringement of patents or other rights of third parties that may result from its use. We reserve the right to change the circuitry and specifications without notice.

Life Support Policy: AIC does not authorize any AIC product for use in life support devices and/or systems. Life support devices or systems are devices or systems which, (i) are intended for surgical implant into the body or (ii) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.