

FEATURES

- 2.5V to 5.5V Input Voltage Range
- 380mV @300mA Dropout Voltage
- Excellent Transient Response
- Stable with 1 μ F Ceramic Output Capacitor
- 70dB PSRR at 1kHz
- Low 37 μ A Quiescent Current
- Low Shutdown Current: <1 μ A
- Output Accuracy: \pm 2%
- Fixed Output Voltage: 1.2V~3.3V (0.1V per step)
- Current Limit Protection
- Thermal Shutdown
- Output Auto-Discharge in Shutdown
- RoHS Compliant and 100% Lead (Pb)-Free Halogen-Free

APPLICATIONS

- Cellular Phones
- Bluetooth portable radios and Accessories
- Battery-Powered Equipment
- Laptop, Palmtops, Notebook Computer
- PDAs
- Digital still Camera and Video Recorders


DESCRIPTION

The AIC1747B is a 300mA, low-dropout (LDO) linear regulator with fast transient response and high PSRR. It offers high output accuracy, low dropout voltage and low quiescent current as well as fast start-up time. This regulator is based on a CMOS process.

The AIC1747B is designed to work with low-ESR ceramic capacitors, reducing the amount of the PCB area necessary for power applications. Only a 1 μ F ceramic output capacitor can make the device stable over the whole load range current (0mA to 300mA).



The other key features of AIC1747B include over-current protection and thermal shutdown. The AIC1747B is packaged in DFN 4L 1 \times 1 package.

TYPICAL APPLICATION CIRCUIT

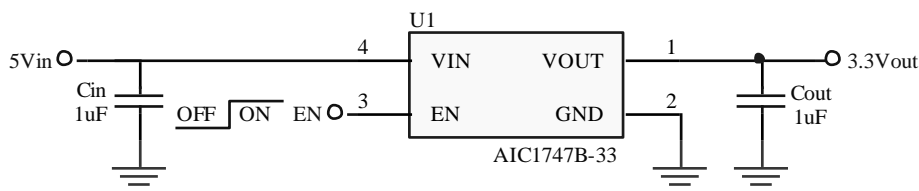

AIC1747B Typical Application Circuit

ORDERING INFORMATION

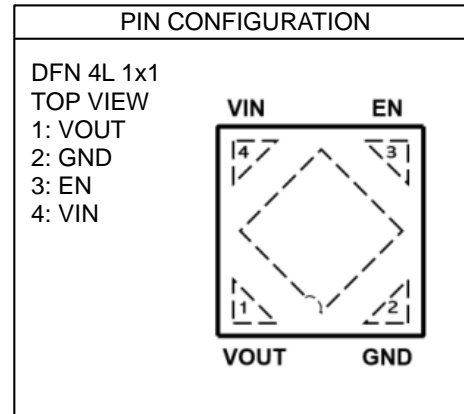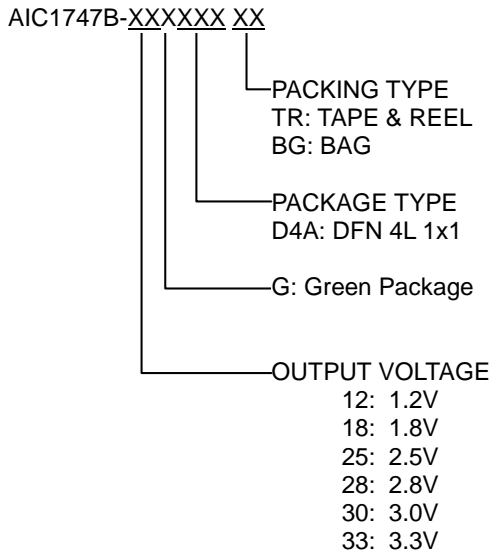

(Of a unit of 0.1V within 1.2~3.3V, additional voltage versions are available on demand)

Example: AIC1747B-18GD4ATR
 → 1.8V Version, in DFN 4L 1x1 Green Package and Tape & Reel Packing Type

Part Number	Package	Top Mark
AIC1747B-12GD4A	DFN1x1	TDBxxx
AIC1747B-18GD4A	DFN1x1	TDCxxx
AIC1747B-28GD4A	DFN1x1	TDExxx
AIC1747B-30GD4A	DFN1x1	TDFxxx

Top Mark: (xxx: Inside code)

ABSOLUTE MAXIMUM RATINGS

VIN Pin and EN Pin Voltage.....	-0.3~6V
All other pins Voltage	-0.3 to (VIN+0.3)
Maximum Junction Temperature.....	160°C
Storage Temperature Range	-65°C~150°C
Lead Temperature (Soldering, 10 sec).....	260°C
Thermal Resistance - Junction to Ambient DFN 4L 1x1	239°C/W (Assume no ambient airflow)

Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

■ ELECTRICAL CHARACTERISTICS
($V_{IN}=V_{OUT}+1V$, or $V_{IN}=2.5V$ for $V_{OUT}<1.5V$, $T_A=25^{\circ}C$, unless otherwise specified) (Note 1)

PARAMETER	TEST CONDITIONS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Input Voltage						
Input Voltage Range		V_{IN}	2.5		5.5	V
Quiescent Current	$V_{EN}=2.5V$, $I_{OUT}=0mA$	I_Q	35		70	μA
Shutdown Current	$V_{EN}=0V$	I_{SHDN}		0.1	1	μA
Power Supply Ripple Rejection	$V_{IN}=V_{nom}+1V_{P-P}$, $f=1kHz$, $I_{LOAD}=10mA$	PSRR		70		dB
Enable						
Enable High Voltage	All temperature range	V_{ENH}	1.5			V
Enable Low Voltage	All temperature range	V_{ENL}			0.4	V
EN Input Current	$V_{IN}=3.5V$, $V_{EN}=3.5V$ or $0V$	I_{EN}	-1	0.2	1	μA
Start-up Time	$V_{IN}=3.5V$, $V_{OUT}=2.5V$	T_{ST}		40		μS
Output Voltage						
Output Voltage Accuracy	$V_{IN}=V_{OUT}+1V$, $I_{OUT}=10mA$	V_{OUT}	-2		+2	%
	$V_{IN}=V_{OUT}+1V$, $I_{OUT}=10mA$, $T_A=-40^{\circ}C$ to $+85^{\circ}C$		-3		+3	%
Output Line Regulation	$V_{OUT}+0.5V < V_{IN} < 5.5V$, $I_{OUT}=10mA$	V_{LNR}		0.01	0.1	%/V
Output Load Regulation	$1mA < I_{OUT} < 300mA$, $V_{IN}=V_{NOM}+1.0V$	V_{LDR}		3	6	mV
Dropout Voltage (Note 2)	$I_{OUT}=300mA$ (Applied for $V_{OUT} \geq 2.3V$)	V_{DROP}		320	350	mV
Maximum Output Current		I_{OUTMAX}	300			mA
Protection						
Current Limit		I_{limit}	350	470		mA
Resistance of Auto-Discharge		R_{AD}		130		Ω
Thermal Shutdown Temperature	No Load, $V_{IN}=V_{EN}=5V$	T_{SD}		155		$^{\circ}C$
Thermal Shutdown Hysteresis	No Load, $V_{IN}=V_{EN}=5V$	T_{SDHYS}		30		$^{\circ}C$

Note 1. Specifications are production tested at $T_A=25^{\circ}C$. Specifications over the $-40^{\circ}C$ to $85^{\circ}C$ operating temperature range are assured by design, characterization and correlation with Statistical Quality Controls (SQC).

Note 2. Dropout is defined as $V_{IN}-V_{OUT}$ when V_{OUT} is 2% below the value of V_{OUT} for $V_{IN}=V_{OUT}+0.5V$.

TYPICAL PERFORMANCE CHARACTERISTICS

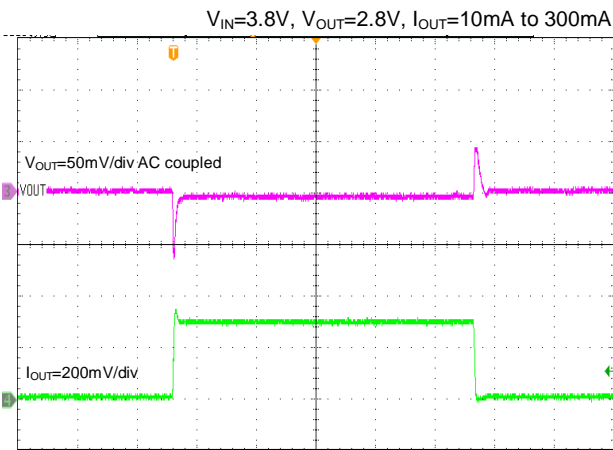


Fig. 1 Load Transient

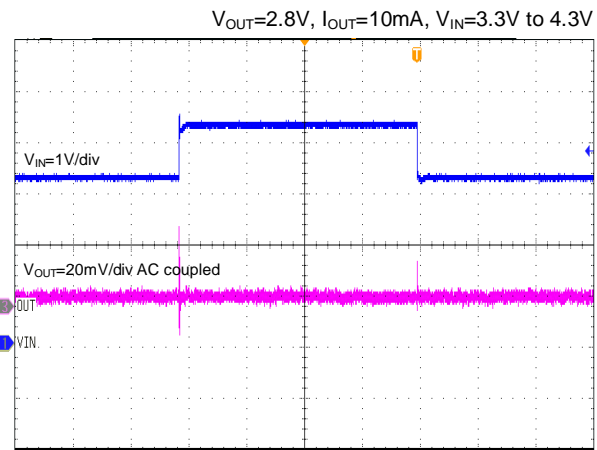


Fig. 2 Line Transient

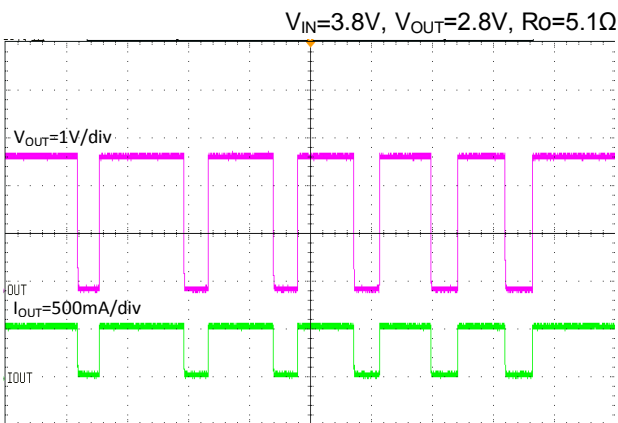


Fig. 3 Over Temperature Protection

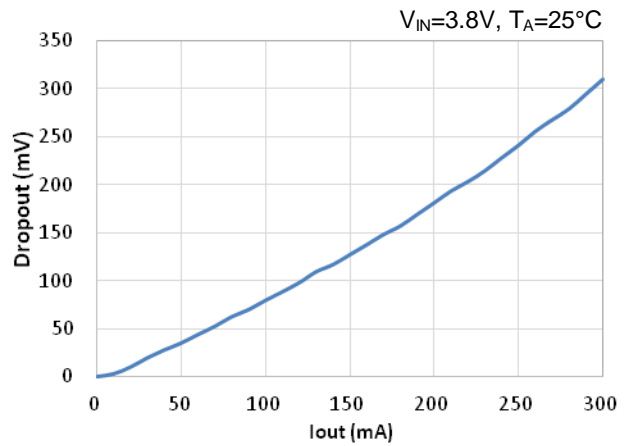


Fig. 4 Dropout vs. I_{out}

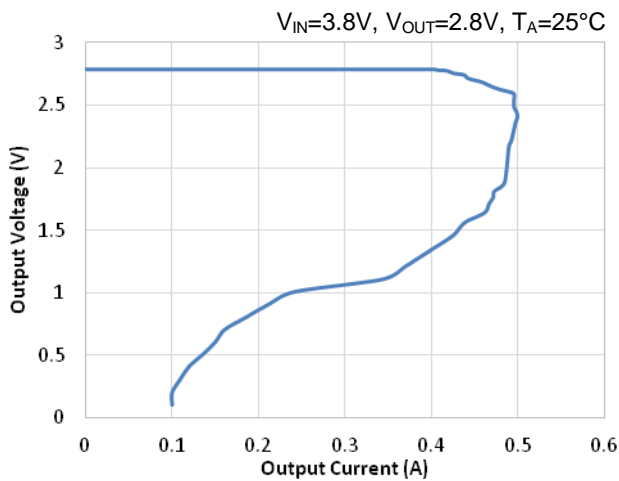


Fig. 5 Over Current Protection

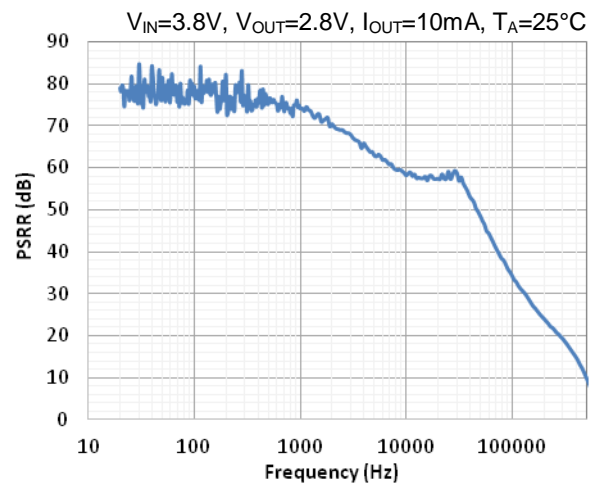
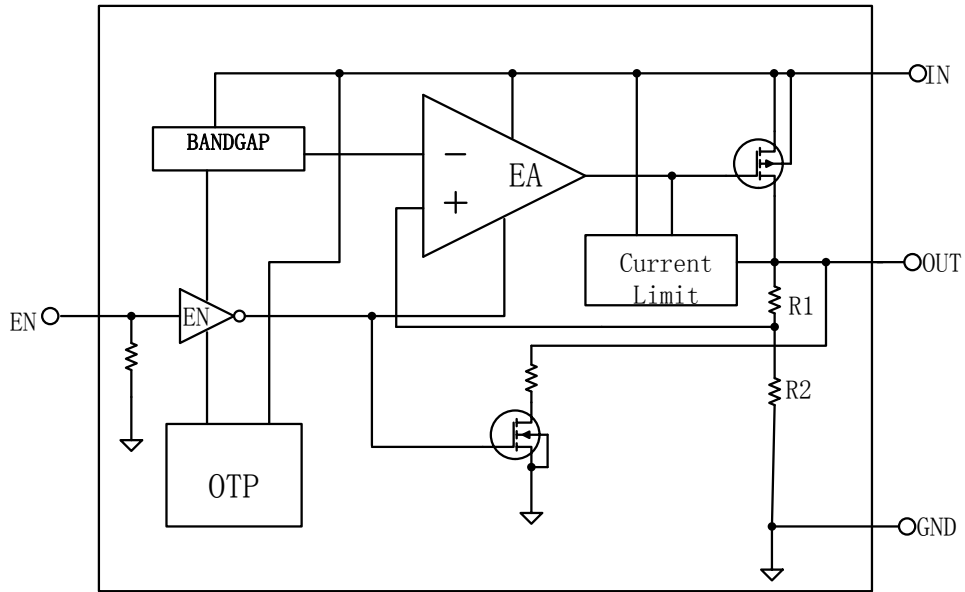


Fig. 6 PSRR vs. Frequency

■ BLOCK DIAGRAM


Functional Block Diagram of AIC1747B

■ PIN DESCRIPTION

- VIN - Input Supply of the LDO.
- GND - Signal Ground.
- EN - Enable Pin. Connect this pin to ground or less than 0.4V to disable the device, connect EN to 1.5V or above to enable the device. This pin should not be floated.
- VOUT - Output of the LDO.

■ Detailed Function Description

The AIC1747B is a high output current, low dropout linear regulator with fast transient response and high PSRR. It offers high output accuracy, low quiescent current and fast start-up time. It is designed to work with low-ESR ceramic capacitor, reducing the amount of the PCB area. Only a 1 μ F ceramic output capacitor can make the device stable over the whole load range.

As shown in the function block diagram, the AIC1747B is composed of the bandgap reference voltage, the error amplifier, P-channel MOSFET pass transistor, internal resistor divider and some additional protection circuits. The reference voltage, connected to the cathode terminal of the error amplifier, compares with the feedback voltage to regulate the output voltage to make it constant over the whole load current range. If the feedback voltage is lower than the reference voltage, the pass transistor gate is pulled lower to increase its conductivity. This allows more current to flow to the output and increase the output voltage. If the feedback voltage is higher than the reference voltage, the pass transistor gate is pulled higher to decrease its conductivity. This allows less current to flow to the output and decrease the output voltage. The feedback point is the output of the internal resistor divider connected to the VOUT pin.

ENABLE/SHUTDOWN

The AIC1747B is disabled when the EN pin is connected to ground or the voltage less than 0.4V, and the quiescent current is less than 1 μ A. Connect EN pin to 1.5V or higher voltage to enable the device. This pin cannot be floated.

OUTPUT AUTO DISCHARGE

When the regulator is disabled, an internal 130 Ω resistor is connected between VOUT and GND to discharge output capacitor C_{OUT}.

CURRENT LIMIT

The AIC1747B includes a current limit circuit to monitor the gate voltage of the pass transistor to limit the output current. When the output current is higher than the over-current limit, the circuit will clamp the gate voltage of the pass transistor to limit the output current. The typical output current limit is 450mA.

SHORT CIRCUIT PROTECTION

When VOUT pin is short-circuit to GND, short circuit protection will be triggered and clamp the output current to approximately 90mA. This feature protects the regulator from over current condition and damage due to overheating.

THERMAL SHUTDOWN

The AIC1747B monitors internal temperature. When the junction temperature exceeds 155 $^{\circ}$ C, the over temperature protection (OTP) circuit turn off the pass transistor until the device is cooled down by 30 $^{\circ}$ C. Then the pass transistor resumes. For continue operation, do not exceed absolute maximum junction temperature.

■ APPLICATION INFORMATION***EXTERNAL CAPACITOR***

The AIC1747B requires external capacitor for stability. It is specifically designed to work with low-ESR capacitors requiring minimum PCB area. Place the external capacitors as close as possible to the device.

INPUT CAPACITOR

A 1 μ F or higher capacitance value ceramic capacitor is required between the VIN pin and the GND pin. Place it as close as possible to the


device. There are no requirements for the ESR on the input capacitor, but the tolerance and temperature coefficient must be capacitance is 1 μ F over the whole operating temperature range.

OUTPUT CAPACITOR

An output capacitor (C_{OUT}) is needed to improve transient response and maintain stability. The AIC1747B is stable with very small ceramic output capacitors. A 1 μ F to 10 μ F capacitor is suitable for the most AIC1747B applications.

■ PHYSICAL DIMENSIONS

● DFN 4L 1x1

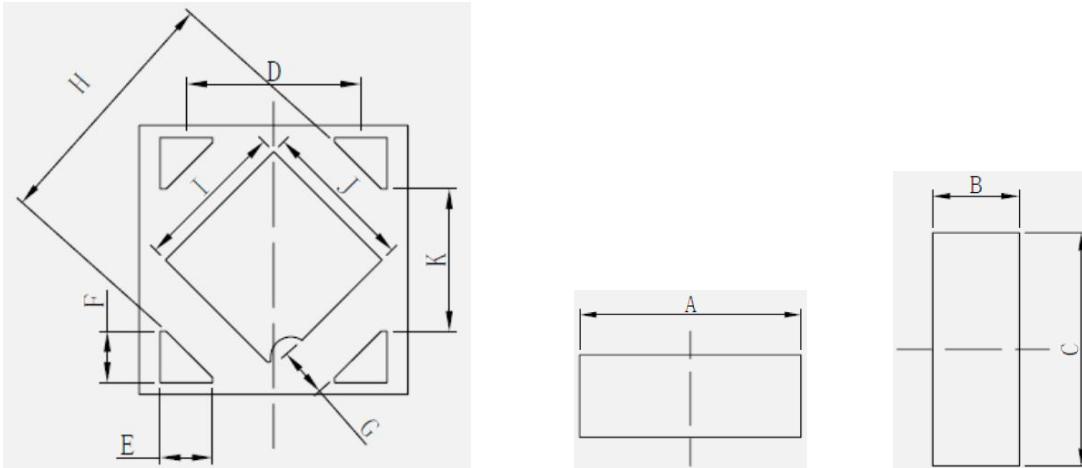

Dimensions In Millimeterer			
Symbol	MIN	TYP	MAX
A	0.950	1.000	1.050
B	0.320	0.370	0.420
C	0.950	1.000	1.050
D	0.600	0.650	0.700
E	0.145	0.195	0.245
F	0.140	0.190	0.240
G	0.134	0.184	0.234
H	0.890	0.940	0.990
I	0.520	0.570	0.620
J	0.520	0.570	0.620
K	0.480	0.530	0.580

Note:

Information provided by AIC is believed to be accurate and reliable. However, we cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an AIC product; nor for any infringement of patents or other rights of third parties that may result from its use. We reserve the right to change the circuitry and specifications without notice.

Life Support Policy: AIC does not authorize any AIC product for use in life support devices and/or systems. Life support devices or systems are devices or systems which, (i) are intended for surgical implant into the body or (ii) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.